



Traction cable

RADOX TENUIS-TW 600V MM

Product description:

RADOX TENUIS-TW 600V MM

Nominal voltage:

Multicore cables, unscreened

600 / 1000 V AC

Hazard level:

M (extra low temperature, extra oil and extra fuel resistant)

General features:


Halogen free, electron-beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occur during service.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

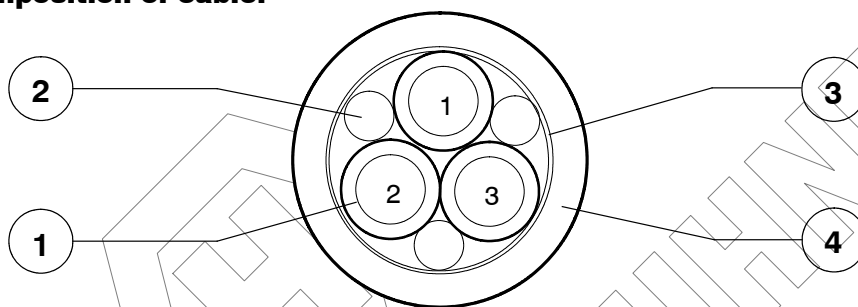

1. RADOX TENUIS-TW 600V cores

Conductor: stranded tin plated copper, acc. to EN 50306-2

Insulation: RADOX EI 303

Colours: white, black numbered

green-yellow (optional)

2. Filler (optional)

RADOX 125 REC

3. Separator (optional)

Tape

4. Sheath

RADOX EM 104, acc. to EN 50264-1

Colour: black, yellow marked

Marking: HUBER+SUHNER RADOX TENUIS-TW 600V nX[cross section] MM [part. no. + batch. no.] [date of manufacture] [prod.-place]

Technical Data :

Voltage rating cond.- earth	U ₀	600	V AC
Voltage rating cond.- cond.	U	1000	V AC
maximum permissible Voltage rating AC cond.- earth		720	V AC
maximum permissible Voltage rating AC cond.- cond.	U _m	1200	V AC
maximum permissible Voltage rating DC cond.- earth	V ₀	900	V DC
maximum permissible Voltage rating DC cond.- cond.		1500	V DC
Test voltage		3500	V AC
		8400	V DC

Temperature range

fixed installation - 50 ... + 120 °C

sporadic movement - 25 ... + 90 °C

Min. bending radius

fixed installation cable diameter ≤ 12 mm 3 x D

..... cable diameter > 12 mm 4 x D

sporadic movement cable diameter ≤ 12 mm 4 x D

..... cable diameter > 12 mm 5 x D

Copyright 2014 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG

Low Frequency Division

CH- 8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX TENUIS-TW 600V MM

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.
The lower temperature limit is determined by bending and elongation tests according to EN 60811-1-4 Par. 8, respectively low temperature behaviour tests according to GOST 20.57.406-81, method 204-1 and GOST 17491-80.
The specified bending radii require a careful and proper handling using proven fastening technologies.

The cables are in conformity with:

Fire protection on railway vehicles, category	Ia, Ib, II	BS 6853, GM/RT 2130
Vertical flame spread	$50 < L \leq 540 \text{ mm}$	EN 60332-1-2
Vertical flame spread, bunched	$L \leq 2.5 \text{ m}$	EN 50266, BS 6853 An. D.8.7
Smoke density	$A_0 \leq \text{BS 6853}$	BS 6853 An. D.8.7
Toxicity	$R \leq 1.0$	BS 6853 An. B.1
Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	$50 < L \leq 540 \text{ mm}$	EN 60332-1-2
Vertical flame spread, bunched, $D \leq 6 \text{ mm}$	$L \leq 1.5 \text{ m}$	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12 \text{ mm}$	$L \leq 2.5 \text{ m}$	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, $D \geq 12 \text{ mm}$	$L \leq 2.5 \text{ m}$	EN 60332-3-24
Smoke density	$T \geq 70 \%$	EN 61034-2
Toxicity	$\text{ITC} \leq 6$	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	$50 < L \leq 540 \text{ mm}$	EN 60332-1-2
Vertical flame spread, bunched, $D \leq 6 \text{ mm}$	$L \leq 1.5 \text{ m}$	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12 \text{ mm}$	$L \leq 2.5 \text{ m}$	EN 60332-3-25
Vertical flame spread, bunched, $D \geq 12 \text{ mm}$	$L \leq 2.5 \text{ m}$	EN 60332-3-24
Smoke density	$T \geq 60 \%$	EN 61034-2
Corrosivity of combustion gases	$\text{pH} \geq 4.3, C \leq 10 \mu\text{S/mm}$	EN 50267-2-2
Amount of halogen acid gas	$\text{HCl} + \text{HBr} \leq 0.5 \%$	EN 50267-2-1
Content of fluorine	$\text{HF} \leq 0.1 \%$	EN 60684-2, 45.2
Toxicity, insulation	$\text{ITC} \leq 6$	EN 50305, 9.2
Toxicity, filler and sheath	$\text{ITC} \leq 3$	EN 50305, 9.2
Fire protection on railway vehicles, category	A1, A2, B	NF F16-101
Fire protection on railway vehicles, class	C / F1	NF F16-101
Vertical flame spread	$50 < L \leq 540 \text{ mm}$	NF C32-070, 2.1
Vertical flame spread, bunched	$L \leq 300 \text{ mm}$	NF C32-070, 2.2
Smoke index	$\text{I.F.} \leq 5$	X10-702-2, NF X70-100-1
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	$L \leq 1.5 \text{ m}$	UL 1685, 12 (FT4 exp.)
Smoke density	$\text{TSR} \leq 150 \text{ m}^2, \text{PSRR} \leq 0.40 \text{ m}^2/\text{s}$	UL 1685, 12 (FT4 exp.)
Fire protection on railway vehicles, hazard level	LR1 - LR4	UNI CEI 11170
Vertical flame spread	$50 < L \leq 540 \text{ mm}$	EN 60332-1-2
Vertical flame spread, bunched, $D \leq 6 \text{ mm}$	$L \leq 1.5 \text{ m}$	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12 \text{ mm}$	$L \leq 2.5 \text{ m}$	EN 60332-3-25
Vertical flame spread, bunched, $D \geq 12 \text{ mm}$	$L \leq 2.5 \text{ m}$	EN 60332-3-24
Smoke density	$T \geq 70 \%$	EN 61034-2
Corrosivity of combustion gases	$\text{pH} \geq 4.3, C \leq 10 \mu\text{S/mm}$	EN 50267-2-2
Amount of halogen acid gas	$\text{HCl} + \text{HBr} \leq 0.5 \%$	EN 50267-2-1
Toxicity, insulation	$\text{ITC} \leq 6$	EN 50305, 9.2
Toxicity, filler and sheath	$\text{ITC} \leq 3$	EN 50305, 9.2
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	$L \leq 1.5 \text{ m}$	UL 1685, 12 (FT4 exp.)
Smoke density	$\text{TSR} \leq 150 \text{ m}^2, \text{PSRR} \leq 0.40 \text{ m}^2/\text{s}$	UL 1685, 12 (FT4 exp.)
Requirement of hazard level code M	(according to EN 50264-1 or EN 50306-1)	
Extra low temperature	-40°C	
Extra oil resistance	IRM 902, 72h, 100°C	
Extra fuel resistance	IRM 903, 168h, 70°C	

Applicable documents:

581998 current rating for multi core cables



Traction cable

RADOX TENUIS-TW 600V MM

Construction n x mm ²	Conductor Dia. _{nom.} mm	Core Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ max. Ω/km	Fireload nom. kJ/m	Weight _{nom.} Copper Cable kg / 100m		H+S Part No.
4x0.25 *)	0.61	1.17	4.95 ±0.15	88.5	385	1.9	4.4	85 024 776

*) higher sheath thickness

Construction n x mm ²	Conductor Dia. _{nom.} mm	Core Dia. _{nom.} mm	Cable Dia. mm	R ₂₀ max. Ω/km	Fireload nom. kJ/m	Weight _{nom.} Copper Cable kg / 100m		H+S Part No.
2x0.5	0.88	1.42	4.4 ± 0.2	40.1	300	0.9	3.1	12 568 036
3x0.5	0.88	1.42	4.6 ± 0.2	40.1	329	1.4	3.6	12 568 037
4x0.5	0.88	1.42	5.0 ± 0.2	40.1	385	1.8	4.4	12 568 038
5x0.5	0.88	1.42	5.5 ± 0.2	40.1	473	2.3	5.4	12 566 304
6x0.5	0.88	1.42	6.0 ± 0.2	40.1	569	2.7	6.4	12 568 039
9x0.5	0.88	1.42	7.3 ± 0.3	40.1	792	4.1	9.1	12 583 000
12x0.5	0.88	1.42	7.6 ± 0.3	40.1	862	5.5	10.7	12 585 961
15x0.5	0.88	1.42	8.6 ± 0.3	40.1	1102	6.9	13.5	12 583 667
16x0.5	0.88	1.42	8.6 ± 0.3	40.1	1102	7.3	13.9	84 096 896
25x0.5	0.88	1.42	10.5 ± 0.4	40.1	1623	11.5	20.9	12 583 001
2x2x0.5	0.88	1.42	6.8 ± 0.3	40.1	654	1.8	6.4	12 568 040
4x2x0.5	0.88	1.42	8.5 ± 0.3	40.1	966	3.6	10.3	12 568 041
6x2x0.5	0.88	1.42	10.2 ± 0.4	40.1	1451	5.5	14.9	84 097 766
2x0.75	1.09	1.62	4.75 ± 0.3	26.7	343	1.4	3.8	12 568 047
3x0.75	1.09	1.62	5.15 ± 0.3	26.7	401	2.1	4.8	12 568 048
3G0.75	1.09	1.62	5.15 ± 0.3	26.7	401	2.1	4.8	12 583 990
4x0.75	1.09	1.62	5.6 ± 0.3	26.7	468	2.8	5.9	12 568 049
4G0.75	1.09	1.62	5.6 ± 0.3	26.7	468	2.8	5.9	12 583 992
5G0.75	1.09	1.62	6.3 ± 0.3	26.7	599	3.5	7.4	12 583 991
6x0.75	1.09	1.62	6.75 ± 0.3	26.7	707	4.2	8.7	12 568 050
8x0.75	1.09	1.62	7.8 ± 0.3	26.7	978	5.6	11.5	12 584 272
10x0.75	1.09	1.62	8.1 ± 0.3	26.7	935	7.0	12.8	12 585 274
12x0.75	1.09	1.62	8.4 ± 0.3	26.7	1006	8.4	14.5	84 111 116
4x2x0.75	1.09	1.62	9.5 ± 0.3	26.7	1200	5.6	13.9	84 097 783



Traction cable

RADOX TENUIS-TW 600V MM

Construction n x mm ²	Conductor Dia.-nom. mm	Core Dia.-nom. mm	Cable Dia. mm	R ₂₀ max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H+S Part No.
2x1	1.23	1.77	5.1 ± 0.2	20.0	391	1.8	4.6	12 568 052
3x1	1.23	1.77	5.4 ± 0.2	20.0	434	2.7	5.6	12 568 053
4x1	1.23	1.77	5.8 ± 0.2	20.0	492	3.6	6.8	12 568 054
6x1	1.23	1.77	7.3 ± 0.3	20.0	814	5.4	10.5	12 568 055
7x1	1.23	1.77	8.0 ± 0.3	20.0	994	6.3	12.4	12 585 459
8x1	1.23	1.77	8.3 ± 0.3	20.0	1093	7.2	13.8	84 121 018
10x1	1.23	1.77	8.7 ± 0.3	20.0	1055	9.0	15.5	12 581 348
12x1	1.23	1.77	9.1 ± 0.3	20.0	1151	10.8	17.7	12 584 271
16x1	1.23	1.77	10.4 ± 0.4	20.0	1524	14.4	23.5	12 584 654
19x1	1.23	1.77	11.6 ± 0.4	20.0	1925	17.2	28.4	12 585 980
25x1	1.23	1.77	12.8 ± 0.4	20.0	2234	22.6	35.6	12 581 349
2x2x1	1.23	1.77	8.0 ± 0.3	20.0	886	3.6	9.6	12 583 421
2x1.5	1.49	2.17	6.0 ± 0.3	13.7	519	2.6	6.3	12 568 098
3x1.5	1.49	2.17	6.3 ± 0.3	13.7	572	3.9	7.8	12 568 099
3G1.5	1.49	2.17	6.3 ± 0.3	13.7	572	3.9	7.8	12 582 026
4x1.5	1.49	2.17	6.9 ± 0.3	13.7	670	5.2	9.6	12 568 100
4G1.5	1.49	2.17	6.9 ± 0.3	13.7	672	5.2	9.6	12 583 172
5x1.5	1.49	2.17	7.8 ± 0.3	13.7	884	6.6	12.2	12 581 350
5G1.5	1.49	2.17	7.8 ± 0.3	13.7	884	6.6	12.2	12 582 027
6x1.5	1.49	2.17	8.45 ± 0.3	13.7	1058	7.9	14.4	12 582 028
7x1.5	1.49	2.17	9.1 ± 0.3	13.7	1253	9.2	16.8	12 583 724
7G1.5	1.49	2.17	9.1 ± 0.3	13.7	1253	9.2	16.8	12 582 029
8x1.5	1.49	2.17	10.3 ± 0.4	13.7	1639	10.6	20.5	12 582 030
9G1.5	1.49	2.17	10.6 ± 0.4	13.7	1474	11.9	21.1	12 584 489
10x1.5	1.49	2.17	10.6 ± 0.4	13.7	1443	13.2	22.1	12 582 031
12x1.5	1.49	2.17	11.1 ± 0.4	13.7	1639	15.8	25.8	12 583 725
16x1.5	1.49	2.17	12.6 ± 0.4	13.7	2130	21.1	33.8	12 583 726
20x1.5	1.49	2.17	14.0 ± 0.4	13.7	2697	26.5	42.1	12 586 297



Traction cable

RADOX TENUIS-TW 600V MM

Construction n x mm ²	Conductor Dia.-nom. mm	Core Dia.-nom. mm	Cable Dia. mm	R ₂₀ max. Ω/km	Fireload nom. kJ/m	Weight nom. Copper Cable kg / 100m		H+S Part No.
25x1.5	1.49	2.17	15.5 ± 0.5	13.7	3059	33.1	51.0	84 103 977
25G1.5	1.49	2.17	15.5 ± 0.5	13.7	3057	33.1	51.0	12 582 033
30x1.5	1.49	2.17	16.7 ± 0.5	13.7	3606	39.7	60.6	12 586 298
2x2.5	1.96	2.75	7.3 ± 0.3	8.21	766	4.4	9.8	12 568 101
3x2.5	1.96	2.75	7.8 ± 0.3	8.21	854	6.6	12.2	12 582 034
3G2.5	1.96	2.75	7.8 ± 0.3	8.21	854	6.6	12.2	12 582 035
4x2.5	1.96	2.75	8.7 ± 0.3	8.21	1049	8.8	15.5	12 566 306
4G2.5	1.96	2.75	8.7 ± 0.3	8.21	1051	8.8	15.6	12 583 173
5x2.5	1.96	2.75	9.4 ± 0.3	8.21	1249	11.0	18.7	12 581 346
5G2.5	1.96	2.75	9.4 ± 0.3	8.21	1249	11.0	18.7	12 585 007
6x2.5	1.96	2.75	10.6 ± 0.4	8.21	1628	13.2	23.2	12 581 347
7G2.5	1.96	2.75	11.5 ± 0.4	8.21	1960	15.4	27.3	12 583 995
16x2.5	1.96	2.75	15.8 ± 0.5	8.21	3239	35.3	54.6	85 002 904
20x2.5	1.96	2.75	17.6 ± 0.5	8.21	4126	44.1	68.1	12 585 070
30x2.5	1.96	2.75	20.9 ± 0.5	8.21	5418	66.2	97.5	12 584 363
36x2.5	1.96	2.75	22.5 ± 0.5	8.21	6408	79.6	115.8	12 584 406
4x4	2.46	3.35	10.2 ± 0.4	5.09	1442	14.0	22.9	12 585 458



Traction cable

RADOX TENUIS-TW 600V MM

Cables with colored cores:

Cons- truction n x mm ²	Con- ductor Dia. _{nom} mm	Core colors	Core D _{nom} mm	Cable Dia. mm	R ₂₀ max Ω/km	Fireload nom. kJ/m	Weight Copper Cable kg/100m		H + S Part No.
2V0.5	0.88	BN- BU	1.42	4.4 ± 0.2	40.1	300	0.9	3.1	12 584 136
3V0.5	0.88	BN- BU- BK	1.42	4.6 ± 0.2	40.1	329	1.4	3.6	12 584 137
4V0.5	0.88	BN- BU- BK- WH	1.42	5.0 ± 0.2	40.1	385	1.8	4.4	12 584 138
5V0.5	0.88	BN- BU- BK- WH- GY	1.42	5.5 ± 0.2	40.1	473	2.3	5.4	12 585 752
6V0.5	0.88	BN- BU- BK- WH- GY- RD	1.42	6.0 ± 0.2	40.1	568	2.8	6.4	84 118 473
6V0.5	0.88	BN- BU- BK- WH- GY- RD	1.42	6.0 ± 0.2	40.1	568	2.8	6.4	84 118 473
2V1	1.23	BU- RD	1.77	5.1 ± 0.2	20.0	381	1.8	4.5	84 090 409

Cores :

R₂₀ :

C' :

V :

G :

Core details according to H+S Datasheet 564 264

Conductor resistance according to EN 50306-2

Capacity per unit length, core/core

Colored cores

earth = green- yellow