



Traction cable

RADOX GKW-LW 600V MM S

Product description:

RADOX GKW-LW 600V MM S

Multicore cables, screened (overall screen)

Nominal voltage:

600 / 1000 V AC

Hazard level:

M (extra low temperature, extra oil and extra fuel resistant)

General features:


Halogen free, electron-beam cross-linked cables with improved behaviour in case of fire, easy to strip, soldering iron resistant and flexible.

Application:

The cables are intended for permanent installation in rail vehicles or for applications in which a limited alternating bending stress occur during service.

Guidelines for selection and installation are described in the standards EN 50355 and EN 50343.

General composition of cable:

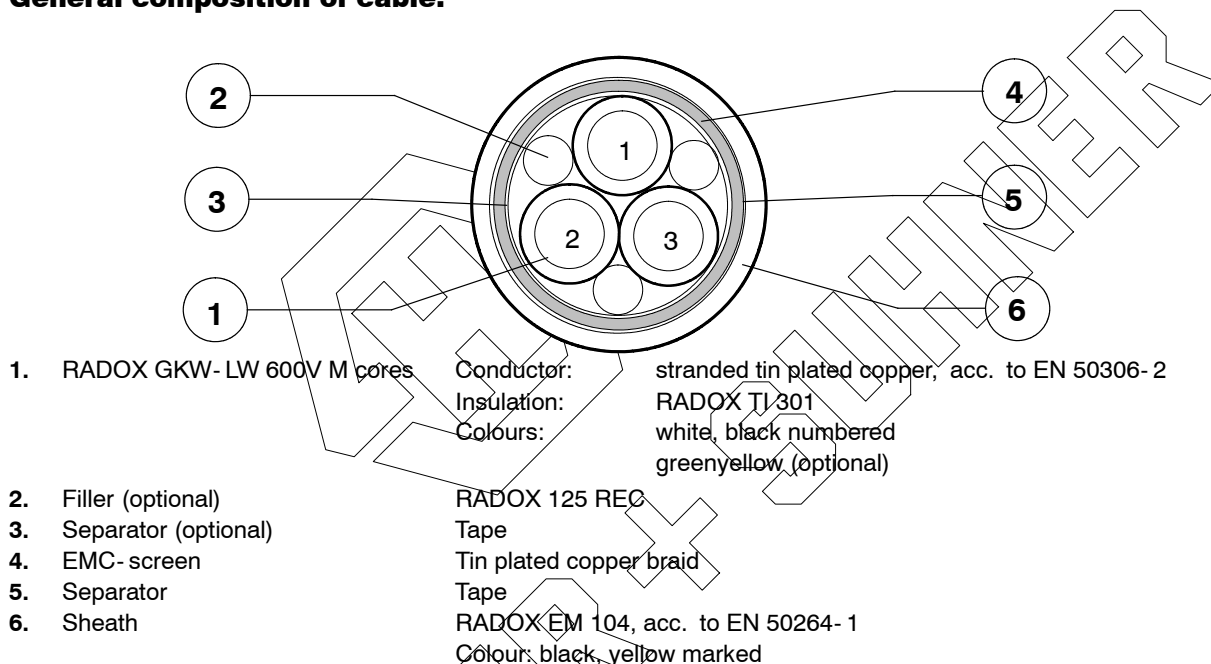

Marking: HUBER+SUHNER RADOX GKW-LW 600V nX [cross section] MM S [part. no.] - [batch. no.] [prod.- place]

Technical Data :

Voltage rating cond.- earth	U_0	600	V AC
Voltage rating cond.- cond.	U	1000	V AC
maximum permissible Voltage rating AC cond.- earth		720	V AC
maximum permissible Voltage rating AC cond.- cond.	U_m	1200	V AC
maximum permissible Voltage rating DC cond.- earth	V_0	900	V DC
maximum permissible Voltage rating DC cond.- cond.		1500	V DC
Test voltage		3500	V AC
		8400	V DC

Temperature range - 50 ... + 120 °C

Min. bending radius

fixed installation	$D \leq 12 \text{ mm}$	3 x D
	$D > 12 \text{ mm}$	4 x D
sporadic movement	$D \leq 12 \text{ mm}$	4 x D
	$D > 12 \text{ mm}$	5 x D

Copyright 2015 HUBER+SUHNER AG. This document may not be amended and its content is confidential. It may not be passed on to third party which are not bound by confidentiality.

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER AG

Low Frequency Division

CH- 8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com



Traction cable

RADOX GKW-LW 600V MM S

NB:

The upper temperature limit is determined by long term ageing according to EN 50305 Par. 7 and extrapolation to 20,000 hours.
The lower temperature limit is determined by bending and elongation tests according to EN 60811-1-4 Par. 8, respectively low temperature behaviour tests according to GOST 20.57.406-81, method 204-1 and GOST 17491-80. (fixed installation)
The specified bending radii require a careful and proper handling using proven fastening technologies.

The cables are in conformity with:

Fire protection on railway vehicles, category	Ia, Ib, II	BS 6853, GM/RT 2130
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332-1-2
Vertical flame spread, bunched	$L \leq 2.5$ m	EN 50266, BS 6853 An. D.8.7
Smoke density	$A_0 \leq$ BS 6853	BS 6853 An. D.8.7
Toxicity	$R \leq 1.0$	BS 6853 An. B.1
Fire protection on railway vehicles, hazard level	HL1 - HL3	EN 45545
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332-1-2
Vertical flame spread, bunched, $D \leq 6$ mm	$L \leq 1.5$ m	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12$ mm	$L \leq 2.5$ m	EN 50305, 9.1.1 (EN 60332-3-25)
Vertical flame spread, bunched, $D \geq 12$ mm	$L \leq 2.5$ m	EN 60332-3-24
Smoke density	$T \geq 70$ %	EN 61034-2
Toxicity	$ITC \leq 6$	EN 50305, 9.2
Fire protection on railway vehicles, level of protection	1 - 4	DIN 5510
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332-1-2
Vertical flame spread, bunched, $D \leq 6$ mm	$L \leq 1.5$ m	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12$ mm	$L \leq 2.5$ m	EN 60332-3-25
Vertical flame spread, bunched, $D \geq 12$ mm	$L \leq 2.5$ m	EN 60332-3-24
Smoke density	$T \geq 60$ %	EN 61034-2
Corrosivity of combustion gases	$pH \geq 4.3$, $C \leq 10$ μ S/mm	EN 50267-2-2
Amount of halogen acid gas	$HCl + HBr \leq 0.5$ %	EN 50267-2-1
Content of fluorine	$HF \leq 0.1$ %	EN 60684-2, 45.2
Toxicity, insulation	$ITC \leq 6$	EN 50305, 9.2
Toxicity, filler and sheath	$ITC \leq 3$	EN 50305, 9.2
Fire protection on railway vehicles, category	A1, A2, B	NF F16-101
Fire protection on railway vehicles, class	C / F1	NF F16-101
Vertical flame spread	$50 < L \leq 540$ mm	NF C32-070, 2.1
Vertical flame spread, bunched	$L \leq 300$ mm	NF C32-070, 2.2
Smoke index	$I.F. \leq 5$	X10-702-2, NF X70-100-1
Fire protection on railway vehicles, hazard level	LR1 - LR4	UNI CEI 11170
Vertical flame spread	$50 < L \leq 540$ mm	EN 60332-1-2
Vertical flame spread, bunched, $D \leq 6$ mm	$L \leq 1.5$ m	EN 50305, 9.1.2
Vertical flame spread, bunched, $6 < D < 12$ mm	$L \leq 2.5$ m	EN 60332-3-25
Vertical flame spread, bunched, $D \geq 12$ mm	$L \leq 2.5$ m	EN 60332-3-24
Smoke density	$T \geq 70$ %	EN 61034-2
Corrosivity of combustion gases	$pH \geq 4.3$, $C \leq 10$ μ S/mm	EN 50267-2-2
Amount of halogen acid gas	$HCl + HBr \leq 0.5$ %	EN 50267-2-1
Toxicity, insulation	$ITC \leq 6$	EN 50305, 9.2
Toxicity, filler and sheath	$ITC \leq 3$	EN 50305, 9.2
Fire protection on railway vehicles	Fulfilled	NFPA 130
Vertical flame spread, bunched	$L \leq 1.5$ m	UL 1685, 12 (FT4 exp.)
Smoke density	$PSRR \leq 0.40$ m ² /s	UL 1685, 12 (FT4 exp.)
	$TSR \leq 150$ m ²	
Requirement of hazard level code M	(acc. to EN 50264-1 or EN 50306-1)	
Extra low temperature	- 40°C	
Extra oil resistance	IRM 902, 72h, 100°C	
Extra fuel resistance	IRM 903, 168h, 70°C	



Traction cable

RADOX GKW-LW 600V MM S

Applicable documents :

H+S : 563078 (e) : Current rating for multicore cables

H+S : 554550 (e) : Technical Datasheet RADOX GKW-LW 600V M (cores)

H+S : DOC - 0000406988 : Technical Specification RADOX GKW-LW 600V Multi core cables screened and unscreened

Metrical cores

Construction	Conductor dia.nom. *)	Core dia.nom.	Screen nom. D cross section mm ²		Cable dia.	R ₂₀ max.	Z _T max.	C' core/ core/ screen		Fireload nom.	Weight nom. copper cable		H + S Part No.
n x mm ²	mm	mm	mm	mm ²	mm	Ω/km	mΩ/m	pF/m		kJ/m	kg/100m		
2 x 0.25**	0.60	1.02	2.5	0.52	3.45 ±0.2	88.5	320	100	170	165	1.0	2.1	12 561 276
2 x 0.25	0.60	1.02	2.5	0.52	3.75 ±0.3	88.5	320	100	170	208	1.0	2.5	12 582 801
8 x 0.25	0.60	1.02	4.4	1.05	5.7 ± 0.3	88.5	140	100	170	511	5.5	2.7	85 009 532
25 x 0.25	0.60	1.02	7.3	2.76	8.9 ± 0.3	88.5	80	100	170	1100	8.4	13.9	12 567 868
2 x 2 x 0.25	0.60	1.02	4.4	1.34	5.7 ± 0.3	91.3	170	100	170	405	2.2	4.9	12 566 633
3 x 2 x 0.25	0.60	1.02	4.7	1.34	6.1 ± 0.3	91.3	150	100	170	455	2.8	5.7	12 566 634
4 x 2 x 0.25	0.60	1.02	5.5	1.72	7.0 ± 0.3	91.3	100	100	170	580	3.5	7.1	12 581 506
7 x 2 x 0.25	0.60	1.02	6.2	2.0	7.8 ± 0.3	91.3	100	100	170	710	5.1	9.2	12 566 694

*) conductor construction see Annex

**) SPEC: with reduced wall thickness



Traction cable

RADOX GKW-LW 600V MM S

Construction n x mm ²	Conductor dia.nom. *) mm	Core dia.nom. mm	Screen nom. D mm	cross section mm ²	Cable dia. mm	R ₂₀ max. Ω/km	Z _T max. mΩ/m	C' core/ core/ screen pF/m	Fireload nom. kJ/m	Weight copper kg/100m	nom. cable	H + S Part No.
2 x 0.5	0.88	1.30	3.1	0.62	4.3 ± 0.3	40.1	200	110 190	255	1.6	3.3	12 555 592
3 x 0.5	0.88	1.30	3.3	0.75	4.5 ± 0.3	40.1	200	110 190	300	2.2	3.8	12 555 593
4 x 0.5	0.88	1.30	3.6	0.88	4.8 ± 0.3	40.1	150	110 190	335	2.8	4.5	12 555 594
5 x 0.5	0.88	1.30	4.1	0.94	5.4 ± 0.3	40.1	150	110 190	400	3.3	5.5	12 555 595
6 x 0.5	0.88	1.30	4.6	1.34	5.9 ± 0.3	40.1	100	110 190	470	4.2	6.9	12 555 596
7 x 0.5	0.88	1.30	5.0	1.53	6.45 ± 0.3	40.1	100	110 190	580	4.7	7.7	12 555 603
8 x 0.5	0.88	1.30	5.5	1.72	6.95 ± 0.3	40.1	100	110 190	675	5.4	9.1	12 561 467
9 x 0.5	0.88	1.30	5.8	1.86	7.2 ± 0.3	40.1	60	110 190	640	6.0	9.7	12 558 109
10 x 0.5	0.88	1.30	5.8	1.86	7.2 ± 0.3	40.1	60	110 190	625	6.5	10.1	12 555 597
12 x 0.5	0.88	1.30	6.0	2	7.6 ± 0.3	40.1	60	110 190	735	7.5	11.6	12 555 598
15 x 0.5	0.88	1.30	7.0	2.76	8.5 ± 0.3	40.1	40	110 190	900	9.8	14.6	12 558 110
16 x 0.5	0.88	1.30	6.8	2.29	8.5 ± 0.3	40.1	40	110 190	945	9.7	14.7	12 555 600
18 x 0.5	0.88	1.30	7.4	2.76	8.9 ± 0.3	40.1	40	110 190	995	11.0	16.1	12 555 601
20 x 0.5	0.88	1.30	7.8	2.99	9.3 ± 0.3	40.1	25	110 190	1120	12.2	18.1	12 562 202
25 x 0.5	0.88	1.30	8.6	3.45	10.3 ± 0.4	40.1	25	110 190	1260	15.1	21.3	12 555 602
30 x 0.5	0.88	1.30	9.3	3.67	11.2 ± 0.4	40.1	25	110 190	1520	17.5	25.1	12 559 008
36 x 0.5	0.88	1.30	10.2	5.44	12.1 ± 0.4	40.1	25	110 190	1790	22.3	30.9	12 559 009
42 x 0.5	0.88	1.30	11.0	6.22	12.9 ± 0.4	40.1	25	110 190	2070	26.1	36.0	12 559 010
48 x 0.5	0.88	1.30	11.6	6.22	13.7 ± 0.4	40.1	60	110 190	2270	28.3	38.9	12 561 833
50 x 0.5	0.88	1.30	12.1	7.0	14.3 ± 0.4	40.1	25	110 190	2410	30.0	41.7	12 559 011
3x(1x 0.5) ¹⁾	0.88	1.30	9.5	3.9	12.3 ± 0.4	40.1	50	- -	2050	7.1	22.3	12 583 513
2 x 2 x 0.5	0.88	1.30	5.0	1.43	6.4 ± 0.3	41.4	200	110 190	535	3.3	6.7	12 555 604
3 x 2 x 0.5	0.88	1.30	5.4	1.72	6.9 ± 0.3	41.4	150	110 190	580	4.5	8.2	12 561 834
3 x (2 x 0.5)	0.88	1.30	7.8	5.55	11.8 ± 0.4	41.4	50	- -	1790	10.6	23.2	84 120 836
4 x 2 x 0.5	0.88	1.30	6.4	1.72	8.0 ± 0.3	41.4	150	110 190	745	5.5	10.1	12 555 605
5 x 2 x 0.5	0.88	1.30	8.5	2.76	9.3 ± 0.3	41.4	60	110 190	780	7.5	13.6	12 566 533
6 x 2 x 0.5	0.88	1.30	7.7	2.99	9.2 ± 0.3	41.4	60	110 190	1010	8.8	14.5	12 557 170
8 x 2 x 0.5	0.88	1.30	8.9	3.22	9.9 ± 0.3	41.4	40	110 190	905	10.8	16.7	12 555 930

*) conductor construction see Annex

1) increased SK




Traction cable

RADOX GKW-LW 600V MM S

Construction $n \times \text{mm}^2$	Conductor dia.nom. *) mm	Core dia.nom. mm	Screen nom. D cross section mm ²		Cable dia. mm	R_{20} max. Ω/km	Z_T max. $\text{m}\Omega/\text{m}$	C' core/ core/ screen pF/m		Fireload nom. kJ/m	Weight nom. copper cable kg/100m		H + S Part No.
			mm	mm ²									
10 x 2 x 0.5	0.88	1.30	9.1	3.67	10.9 ± 0.4	41.4	40	110	190	1280	13.1	20.2	12 555 606
12 x 2 x 0.5	0.88	1.30	10.2	5.44	12.1 ± 0.4	41.4	40	110	190	1520	16.7	25.0	12 562 825
15 x 2 x 0.5	0.88	1.30	11.1	6.22	13.0 ± 0.4	41.4	25	110	190	1830	20.6	29.6	12 555 607
16 x 2 x 0.5	0.88	1.30	11.5	6.22	13.7 ± 0.4	41.4	40	110	190	1920	21.5	31.7	12 560 140
20 x 2 x 0.5	0.88	1.30	14.3	8.16	16.8 ± 0.5	41.4	45	110	190	2840	26.9	42.6	12 561 619

*) conductor construction see Annex

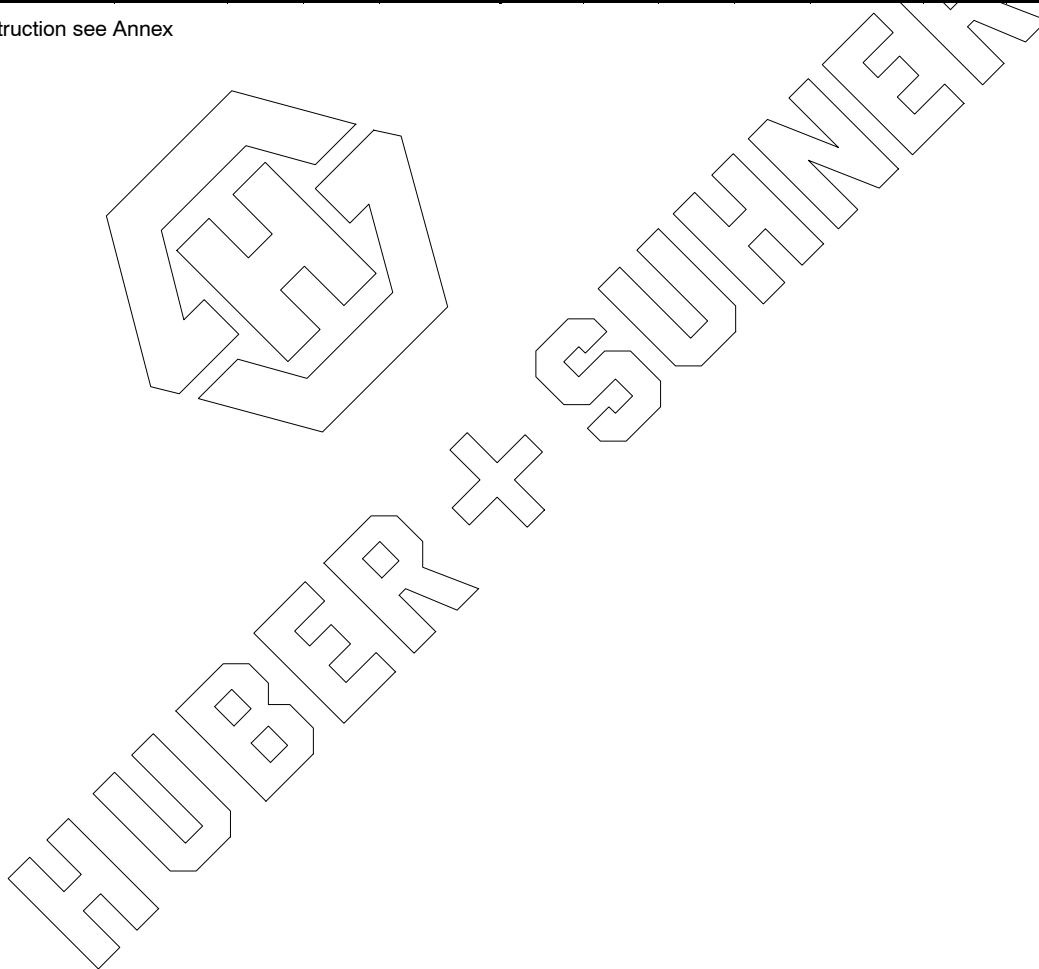



Traction cable

RADOX GKW-LW 600V MM S

Construction n x mm ²	Conductor dia.nom. *) mm	Core dia.nom. mm	Screen nom. D cross section mm ² mm	Cable dia. mm	R ₂₀ max. Ω/km	Z _T max. mΩ/m	C' core/ core/ screen pF/m	Fireload nom. kJ/m	Weight nom. copper cable kg/100m	H + S Part No.
2 x 0.75	1.09	1.52	3.6 0.95	4.8 ± 0.3	26.7	150	120 205	315	2.5 4.2	12 556 629
3 x 0.75	1.09	1.52	3.9 1.05	5.0 ± 0.3	26.7	150	120 205	320	3.2 5.3	12 556 636
4 x 0.75	1.09	1.52	4.3 1.15	5.5 ± 0.3	26.7	100	120 205	380	3.9 6.3	12 556 630
5 x 0.75	1.09	1.52	4.8 1.14	6.1 ± 0.3	26.7	100	120 205	480	4.7 7.5	12 556 637
6 x 0.75	1.09	1.52	5.2 1.72	6.6 ± 0.3	26.7	100	120 205	565	6.0 9.3	12 556 638
7 x 0.75	1.09	1.52	5.9 1.86	7.2 ± 0.3	26.7	100	120 205	680	6.9 10.8	12 556 639
7 x 0.75 ²⁾	1.09	1.52	6.1 2.0	7.7 ± 0.3	26.7	100	120 205	760	6.3 11.8	12 585 257
8 x 0.75	1.09	1.52	6.4 2.0	7.8 ± 0.3	26.7	50	120 205	815	7.6 12.3	12 556 631
10 x 0.75	1.09	1.52	6.7 2.14	8.3 ± 0.3	26.7	50	120 205	785	9.3 13.1	12 556 640
12 x 0.75	1.09	1.52	6.9 2.29	8.4 ± 0.3	26.7	50	120 205	830	10.8 15.4	12 556 632
16 x 0.75	1.09	1.52	8.1 3.45	9.7 ± 0.3	26.7	25	120 205	1110	14.6 20.4	12 556 419
18 x 0.75	1.09	1.52	8.4 3.45	10.2 ± 0.4	26.7	25	120 205	1260	16.3 22.8	12 556 641
24 x 0.75	1.09	1.52	10.1 5.44	12.0 ± 0.4	26.7	25	120 205	1550	22.7 28.8	12 561 836
25 x 0.75	1.09	1.52	10.3 5.83	12.3 ± 0.4	26.7	25	120 205	1620	24.0 32.0	12 556 480
2 x 2 x 0.75	1.09	1.52	6.2 1.72	7.8 ± 0.3	27.6	150	120 205	725	4.7 9.3	12 558 422
3 x 2 x 0.75	1.09	1.52	6.7 1.74	8.3 ± 0.3	27.6	150	120 205	795	6.0 10.8	12 558 423
4 x 2 x 0.75	1.09	1.52	7.8 2.29	9.4 ± 0.3	27.6	60	120 205	940	8.1 14.2	12 568 688
5 x 2 x 0.75	1.09	1.52	8.8 3.45	10.7 ± 0.4	27.6	60	120 205	1210	10.7 18.1	12 562 002
5 x (2x0.75)	1.09	1.52	11.2 5.55	13.5 ± 0.4	27.6		120 205	2100	17.4 30	12 560 882
6 x 2 x 0.75	1.09	1.52	10.0 5.44	11.9 ± 0.4	27.6	65	120 205	1480	13.9 22.7	12 564 824
8 x 2 x 0.75	1.09	1.52	11.1 6.22	13.2 ± 0.4	27.6	60	120 205	2000	17.5 29.0	12 568 613
16 x 2x0.75	1.09	1.52	14.9 8.35	17.5 ± 0.5	27.6	30	120 205	2760	29.1 44.7	85 008 372
3 x 3 x 0.75	1.09	1.52	7.5 3.67	9.0 ± 0.3	27.6	80	120 205	1390	10.1 14.2	12 562 003
3 x (3x0.75)	1.09	1.52	- -	12.0 ± 0.4	27.6	-	- -	1900	9.0 22.9	12 557 512
5 x 4 x 0.75	1.09	1.52	11.3 6.22	13.5 ± 0.4	27.6	100	120 205	2020	20.6 32.3	12 564 825

*) conductor construction see Annex

2) SPEC: cable with short cores- lay length



Traction cable

RADOX GKW-LW 600V MM S

Construction n x mm ²	Conductor dia.nom. *) mm	Core dia.nom. mm	Screen nom. D cross section mm ² mm		Cable dia. mm	R ₂₀ max. Ω/km	Z _T max. mΩ/m	C' core/ core/ screen pF/m		Fireload nom. kJ/m	Weight nom. copper cable kg/100m		H + S Part No.
2 x 1	1.23	1.67	3.8	0.88	5.0 ± 0.3	20.0	200	125	215	345	2.7	5.0	12 555 875
2 x 1 ³⁾	1.23	1.67	3.8	0.88	5.0 ± 0.3	20.0	200	125	215	345	2.7	5.0	12 586 439
3 x 1	1.23	1.67	4.2	1.15	5.5 ± 0.3	20.0	150	125	215	390	3.9	6.2	12 555 688
4 x 1	1.23	1.67	4.5	1.04	5.8 ± 0.3	20.0	150	125	215	430	4.7	7.9	12 555 877
5 x 1	1.23	1.67	5.2	1.23	6.7 ± 0.3	20.0	100	125	215	580	5.7	8.9	12 555 878
6 x 1	1.23	1.67	5.9	1.86	7.3 ± 0.3	20.0	100	125	215	680	7.5	11.0	12 555 879
7 x 1	1.23	1.67	6.4	2.14	7.9 ± 0.3	20.0	60	125	215	820	8.7	12.9	12 555 880
8 x 1	1.23	1.67	7.1	2.29	8.5 ± 0.3	20.0	40	125	215	970	9.5	14.4	12 556 373
10 x 1	1.23	1.67	7.4	2.99	8.9 ± 0.3	20.0	40	125	215	860	12.3	16.4	12 555 881
10 G 1	1.23	1.67	7.4	2.99	8.9 ± 0.3	20.0	40	125	215	860	12.3	16.4	85 063 983
12 x 1	1.23	1.67	7.7	3.22	9.2 ± 0.3	20.0	25	125	215	955	14.0	18.4	12 555 882
16 x 1	1.23	1.67	8.8	3.67	10.5 ± 0.4	20.0	25	125	215	1280	18.4	24.3	12 555 883
18 x 1	1.23	1.67	9.2	3.67	11.2 ± 0.4	20.0	20	125	215	1510	19.9	26.9	12 555 884
25 x 1	1.23	1.67	11.0	6.22	12.9 ± 0.4	20.0	20	125	215	1740	29.5	36.8	12 555 885
27 x 1	1.23	1.67	11.3	6.22	13.4 ± 0.4	20.0	20	125	215	1930	30.7	38.6	12 559 012
30 x 1	1.23	1.67	11.8	6.22	14.0 ± 0.4	20.0	20	125	215	2130	33.4	42.5	12 559 013
36 x 1	1.23	1.67	12.8	7.0	15.2 ± 0.5	20.0	20	125	215	2610	39.9	50.9	12 559 014
42 x 1	1.23	1.67	13.9	8.16	16.5 ± 0.5	20.0	20	125	215	3410	46.3	59.6	12 559 015
50 x 1	1.23	1.67	15.3	10.7	17.8 ± 0.5	20.0	15	125	215	3350	56.9	70.1	12 559 016
2 x 2 x 1	1.23	1.67	6.9	2.0	8.5 ± 0.3	20.7	70	125	215	830	5.8	10.7	12 558 112
2 x (3 x 1)	1.23	1.67	9.9	3.9	12.0 ± 0.4	20.7	70	-	-	1250	13.6	23.0	12 561 698
3 x 2 x 1	1.23	1.67	7.3	2.36	8.9 ± 0.3	20.7	60	125	215	900	7.73	13.1	85 016 744
3 x (2 x 1)	1.23	1.67	8.7	3.9	10.7 ± 0.4	20.7	60	-	-	1000	11.8	20.1	12 565 116
4 x 2 x 1	1.23	1.67	8.8	3.22	10.6 ± 0.4	20.7	40	125	215	1180	10.6	17.7	12 555 886
6 x 2 x 1	1.23	1.67	10.9	5.44	13.0 ± 0.3	20.7	60	125	215	1760	16.6	26.6	12 564 826
10 x 2 x 1	1.23	1.67	13.5	7.13	16.0 ± 0.5	20.7	30	163	280	2787	25.4	43.2	85 008 381
12 x 2 x 1	1.23	1.67	12.9	7.0	15.2 ± 0.5	20.7	30	125	215	2220	28.8	40.0	12 564 827
12 x (2 x 1)	1.23	1.67	17.0	11.5	19.8 ± 0.5	20.7	30	-	-	3100	43.7	65.1	12 565 117
16 x 2 x 1	1.23	1.67	16.5	10.6	19.3 ± 0.5	20.7	25	125	215	3140	39.8	56.4	85 008 380
3 x 4 x 1	1.23	1.67	9.5	4.67	11.3 ± 0.4	20.7	45	125	215	1480	15.6	23.5	12 555 887
4 x 4 x 1	1.23	1.67	10.6	5.44	12.5 ± 0.4	20.7	25	125	215	1770	20.2	29.9	12 558 113

*) conductor construction see Annex

3) SPEC: Cores marked 3 + 4



Traction cable

RADOX GKW-LW 600V MM S

Construction n x mm ²	Conductor dia.nom. *) mm	Core dia.nom. mm	Screen nom. D cross section mm ² mm		Cable dia. mm	R ₂₀ max. Ω/km	Z _T max. mΩ/m	C' core/ core/ screen pF/m		Fireload nom. kJ/m	Weight nom. copper kg/100m		H + S Part No.
2 x 1.5	1.49	2.04	4.5	1.34	5.8 ± 0.3	13.7	150	125	215	455	4.3	7.4	12 555 888
2 x 1.5 ⁴⁾	1.49	2.04	4.5	1.0	5.95 ± 0.3	13.7	150	125	215	470	3.8	7.2	12 581 889
3 x 1.5	1.49	2.04	4.9	1.14	6.2 ± 0.3	13.7	60	125	215	505	5.5	8.6	12 555 889
3 G 1.5	1.49	2.04	4.9	1.14	6.2 ± 0.3	13.7	60	125	215	505	5.5	8.6	12 559 047
4 x 1.5	1.49	2.04	5.4	1.32	6.7 ± 0.3	13.7	100	125	215	570	7.2	10.6	12 555 890
5 x 1.5	1.49	2.04	6.3	2.0	7.8 ± 0.3	13.7	40	125	215	770	9.2	13.7	12 555 891
5 G 1.5	1.49	2.04	6.3	2.0	7.8 ± 0.3	13.7	70	125	215	770	9.2	13.7	12 583 997
6 x 1.5	1.49	2.04	6.9	2.14	8.3 ± 0.3	13.7	60	125	215	880	10.9	15.7	12 555 892
7 x 1.5	1.49	2.04	7.6	2.99	9.2 ± 0.3	13.7	60	125	215	1110	13.2	19.2	12 555 893
7 G 1.5	1.49	2.04	7.6	2.99	9.2 ± 0.3	13.7	60	125	215	1110	13.2	19.2	12 568 979
8 x 1.5	1.49	2.04	8.4	3.22	10.3 ± 0.4	13.7	50	125	215	1420	14.8	22.8	12567260
9 x 1.5	1.49	2.04	8.9	3.67	10.5 ± 0.4	13.7	40	125	215	1300	16.9	24.0	12 558 115
10 x 1.5	1.49	2.04	8.9	3.67	10.5 ± 0.4	13.7	40	125	215	1180	18.4	26.4	12 555 894
12 x 1.5	1.49	2.04	9.2	3.67	11.0 ± 0.4	13.7	25	125	215	1370	20.9	28.1	12 555 895
14 G 1.5	1.49	2.04	10.1	5.44	12.2 ± 0.4	13.7	40	125	215	1690	25.7	34.7	12 568429
16 x 1.5	1.49	2.04	10.6	6.22	12.6 ± 0.4	13.7	20	125	215	1820	29.7	39.2	12 555 896
18 x 1.5	1.49	2.04	11.3	6.22	13.2 ± 0.4	13.7	20	125	215	2010	32.5	42.6	12 555 897
25 G 1.5	1.49	2.04	13.1	7.0	15.6 ± 0.5	13.7	30	125	215	2610	43.3	56.4	12 568430
25 x 1.5	1.49	2.04	13.1	7.0	15.6 ± 0.5	13.7	30	125	215	2610	43.3	56.4	12 555 898
48 x 1.5	1.49	2.04	17.9	12.4	20.7 ± 0.5	13.7	40	125	215	4550	82	103	12 565 317
2 x 2 x 1.5	1.49	2.04	8.3	3.22	10.0 ± 0.3	14.2	70	125	215	1180	9.0	16.4	12 558 114
3 x 2 x 1.5	1.49	2.04	8.8	3.67	10.6 ± 0.4	14.2	70	125	215	1270	12.4	19.9	12 561 927

⁴⁾ Cables with yellow sheath

2 x 2.5	1.93	2.54	5.7	1.72	7.0 ± 0.3	8.21	60	125	215	655	6.0	10.4	12 557 233
3 x 2.5	1.93	2.54	6.1	2.0	7.6 ± 0.3	8.21	60	125	215	730	8.5	13.0	12 554 750
4 x 2.5	1.93	2.54	7.1	2.76	8.6 ± 0.3	8.21	60	125	215	905	11.4	16.7	12 557 234
5 x 2.5	1.93	2.54	7.8	2.99	9.4 ± 0.3	8.21	40	125	215	1130	13.9	20.1	12 557 235
6 x 2.5	1.93	2.54	8.6	3.22	10.4 ± 0.4	8.21	40	125	215	1350	16.0	25.7	12 557 236
7 x 2.5	1.93	2.54	9.6	5.44	11.4 ± 0.4	8.21	40	125	215	1630	21.2	30.5	12 557 237
8 x 2.5	1.93	2.54	10.5	5.44	12.6 ± 0.4	8.21	60	125	215	2060	22.9	34.5	12 568 536
12 x 2.5	1.93	2.54	11.6	6.22	13.7 ± 0.4	8.21	25	125	215	2050	32.1	43.0	12 557 239
27 x 2.5	1.93	2.54	16.8	10.7	19.6 ± 0.5	8.21	40	125	215	3910	69.3	88.5	12 563 351

^{*)} conductor construction see Annex



Traction cable

RADOX GKW-LW 600V MM S

AWG-cores:

Construction	Conductor dia.nom. *)	Core dia.nom.	Screen nom. D cross section		Cable dia.	R ₂₀ max.	Z _T max.	C' nom. core/ core/ screen		Fireload nom.	Weight nom. copper cable		H + S Part No.
n x mm ²	mm	mm	mm	mm ²	mm	Ω/km	mΩ/m	pF/m		kJ/m	kg/100m		
3 x 0.4	0.76	1.18	3.0	0.65	4.4 ± 0.3	54.7	240	200	340	270	1.8	3.5	12 585 812
4 x 0.4	0.76	1.18	3.4	0.78	4.6 ± 0.3	54.7	250	200	340	290	2.2	3.9	12 564 307
15 x 0.4	0.76	1.18	6.2	2.03	7.8 ± 0.3	54.7	70	200	340	890	7.4	11.6	12 561 115
1 x 0.6	0.97	1.39	1.9	0.39	3.0 ± 0.2	33.4	250	-	440	125	1.0	1.7	12 555 681
2 x 0.6	0.97	1.39	3.2	0.65	4.5 ± 0.3	33.4	200	180	310	300	1.8	3.8	12 555 682
3 x 0.6	0.97	1.39	3.5	0.78	4.7 ± 0.3	33.4	200	180	310	315	2.5	4.4	12 555 683
4 x 0.6	0.97	1.39	3.8	0.92	5.1 ± 0.3	33.4	150	180	310	365	3.2	5.3	12 555 684
5 x 0.6	0.97	1.39	4.4	1.28	5.7 ± 0.3	33.4	150	180	310	440	4.1	6.6	12 555 685
1 x 1.2	1.37	1.83	2.3	0.52	3.5 ± 0.2	16.3	250	-	530	160	1.5	2.5	12 555 687
2 x 1.2	1.37	1.83	4.2	0.72	5.6 ± 0.3	16.3	150	200	350	440	3.3	6.6	12 555 587

Cables with coloured cores:

Constr. n x mm ²	Conductor dia.nom. *) mm	Core colours	Core D _{nom} mm	Screen nom. D cross section mm ² mm	Cable dia. mm	R ₂₀ max Ω/km	Z _T max. mΩ/m	C' nom. core/ core/ core screen pF/m		Fireload nom. kJ/m	Weight nom. copper cable kg/100m		H + S Part No.	
4V0.4	0.76	bn, gn, wh, ye	1.18	3.4	0.78	5.0 ± 0.3	54.7	240	200	340	780	2.2	4.5	84 099 242
2V0.5	0.88	bk, rd	1.30	3.1	0.68	4.35 ± 0.3	40.1	200	170	300	280	1.6	3.3	12 568 579
3V0.5	0.88	bk, rd, gn	1.30	3.3	0.75	4.5 ± 0.3	40.1	200	170	300	300	2.2	4.1	12 558 070
4V0.5	0.88	bu, rd, gn, bn	1.30	3.6	0.88	4.9 ± 0.3	40.1	150	170	300	330	2.8	5.2	12 568 580
4V0.5	0.88	bk, rd, gn, bn	1.30	3.6	0.88	4.9 ± 0.3	40.1	150	170	300	330	2.8	5.2	12 584 368
6V0.5	0.88	bk, rd, gn, bn, bu, wh	1.30	4.6	1.34	5.9 ± 0.3	40.1	100	170	300	460	4.1	6.8	12 558 071
8V0.5	0.88	bk, rd, gn, bn, bu, wh, og, ye	1.30	5.5	1.7	6.95 ± 0.3	40.1	100	170	300	690	5.3	9.0	12 568 581
2V2V0.5	0.88	bk/rd gn/bn	1.30	5.0	1.4	6.5 ± 0.3	41.4	200	170	300	680	3.3	6.8	12 568 582

*) conductor construction see Annex

Cores : Core details according to H+S Datasheet 554550
R₂₀ : Conductor resistance according to EN 50306-2
Z_T : Transfer impedance for f ≤ 30 MHz
C' : Capacity per unit length, core/core

Legend: G : green- yellow core
V : various colours



Traction cable

RADOX GKW-LW 600V MM S

Annex

Conductor construction:

mm ²	AWG	Construction
0.4	22	19x0.16 mm
0.5	-	19x0.18 mm
0.6	20	19x0.20 mm
0.75	-	19x0.23 mm
1	18	19x0.26 mm
1.5	-	37x0.23 mm
2	14	37x0.25 mm
2.5	-	37x0.29 mm

HUBER X SUMNER