



Radox 125


Connecting leads

GENERAL PROPERTIES :

Excellent high temperature, low temperature, ozone and weathering resistance, halogen free, soldering iron resistant, easy to strip and process, flexible.

APPLICATION :

For protected and fixed installation inside electrical equipment, especially suitable for the connection of motor windings, switchboards, magnets and transformers.

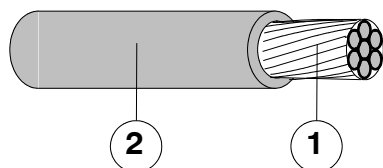

1. Conductor : Stranded tin plated copper, according to IEC 228 cl.5
2. Insulation : RADOX 125 ,
extruded irradiation crosslinked polyolefin
Colours : diverse

Printing: HUBER + SUHNER SWITZERLAND RADOX 125 ...mm²

TECHNICAL DATA :

Temperature range - 40 ... + 125 °C

Voltages for cross-section $\geq 0.75 \text{ mm}^2$:

Rated voltage cond.-earth	U_0	600 V AC
Rated voltage cond.-cond.	U	1000 V AC
Maximum permitted operating voltage cond.-earth		720 V AC
Maximum permitted operating voltage cond.-cond.	U_m	1200 V AC
Maximum permitted operating voltage cond.-earth	V_0	900 V DC
Maximum permitted operating voltage cond.-cond.		1800 V DC
Test voltage		3500 V AC

Voltages for cross-section $< 0.75 \text{ mm}^2$:

Rated voltage cond.-earth	U_0	450 V AC
Rated voltage cond.-cond.	U	750 V AC
Maximum permitted operating voltage cond.-earth		480 V AC
Maximum permitted operating voltage cond.-cond.	U_m	825 V AC
Maximum permitted operating voltage cond.-earth	V_0	620 V DC
Maximum permitted operating voltage cond.-cond.		1240 V DC
Test voltage		2500 V AC

Minimum bending radius Outer diameter $\leq 12 \text{ mm}$ 3 x D
..... Outer diameter $> 12 \text{ mm}$ 4 x D

Copyright 2013 Huber + Suhner AG. This document may not be copied nor be passed on to third parties without our written permission.
Uncontrolled copy when printed (will not be updated).

The product fulfils the test and specification requirements described in this document for the stated areas of application and operating conditions. HUBER+SUHNER AG does not expressly or implicitly guarantee performance under additional or changed conditions. Deviations are to be agreed upon in writing.

HUBER+SUHNER
Wire+Cable Division

CH-8330 Pfäffikon



+41 (0)44 952 22 11



+41 (0)44 952 26 40

www.hubersuhner.com



Radox 125

Connecting leads

TABLE 1 : Dimensions, conductor resistance, weight

Cross section nom. mm ²	Conductor construction nom. n x mmØ	Conductor diameter max. mm	Core diameter D mm	R ₂₀ IEC 228 max. Ω / km	Weight nom. kg / 100m
0.25	19 x 0.13	0.6	1.45 ± 0.05	85.9	0.4
0.34	19 x 0.16	0.8	1.60 ± 0.10	52.1	0.5
0.50	19 x 0.18	0.9	1.70 ± 0.10	40.1	0.7
0.75	24 x 0.20	1.15	2.20 ± 0.10	26.7	1.1
1.0	32 x 0.20	1.3	2.60 ± 0.10	20.0	1.5
1.5	30 x 0.25	1.55	2.73 ± 0.10	13.7	1.9
2.5	48 x 0.25	2.05	3.50 ± 0.10	8.21	3.0
4.0	56 x 0.30	2.6	4.15 ± 0.15	5.09	4.6
6.0	82 x 0.30	3.4	4.95 ± 0.15	3.39	6.7
10	78 x 0.40	4.4	6.15 ± 0.15	1.95	11
16	119 x 0.40	5.4	7.35 ± 0.15	1.24	16.5
25	182 x 0.40	6.7	8.9 ± 0.2	0.795	25
35	266 x 0.40	7.9	10.3 ± 0.2	0.565	34.9
50	378 x 0.40	9.4	12.1 ± 0.25	0.393	50
70	348 x 0.50	11.5	14.4 ± 0.25	0.277	70.8
95	444 x 0.50	12.9	16.0 ± 0.3	0.210	89
120	570 x 0.50	15.1	18.6 ± 0.3	0.164	116
150	722 x 0.50	17.0	20.5 ± 0.3	0.132	145
185	874 x 0.50	18.5	22.2 ± 0.3	0.108	173
240	1147 x 0.50	21.3	25.4 ± 0.3	0.0817	225

The cables are in conformity with :

Halogen-free compound	fulfilled	EN 50363
Corrosivity of combustion gases	pH ≥ 4.3, σ ≤ 10 μS/mm	EN 50267-2-2
Amount of halogen acid gas	HCl+HBr ≤ 0.5%	EN 50267-2-1
Content of fluorine	HF ≤ 0.1%	EN 60684-2, # 45.2